




280 Remington (7mm Remington Express) with 130 gr Spitzer BTSP



Max Case Length:	2.540"
Trim-to Length:	2.530"
Max Cart. OAL:	3.330"
RCBS Shell Holder:	# 3
Test Firearm:	Universal Receiver
Barrel Length:	24"

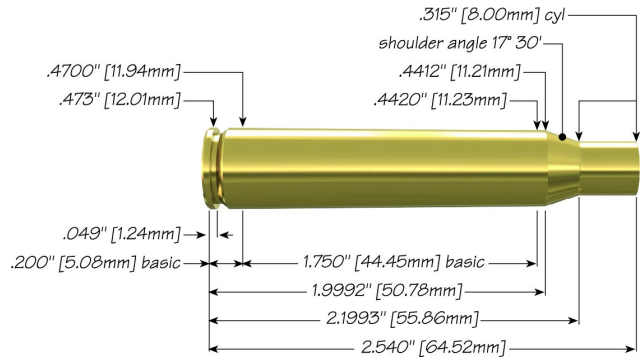

7mm	Speer Part No.	Weight, grains	COAL Tested	Ballistic Coefficient	Sectional Density
	130 gr Spitzer BTSP 1624	130	3.205"	.424	.230
	130 gr Spitzer SP Hot-Cor® 1623	130	3.205"	.368	.230

Propellant	Cartridge Case	Primer	START CHARGE		MAXIMUM CHARGE	
			Grain	Velocity (ft/sec)	Grain	Velocity (ft/sec)
Accurate 3100	Remington	CCI 200	54.0	2721	58.0	2972
Accurate 4350	Remington	CCI 200	53.0	2791	57.0	3066
Alliant Power Pro 2000-MR	Federal	Federal 210	46.4	2782	50.6	2992
Alliant Power Pro 4000-MR	Federal	Federal 210	54.0	2936	57.8	3114
Alliant Reloder 15	Remington	CCI 200	43.0	2774	47.0	2967
Alliant Reloder 16	Federal	Federal 210	51.1	2887	56.8	3139
Alliant Reloder 17	Federal	Federal 210	50.4	2845	55.6	3097

Alliant Reloder 19	Remington	CCI 200	55.0	2835	59.0	3134
Hodgdon H414	Remington	CCI 250	48.5	2844	52.5	2993
Hodgdon H4350	Remington	CCI 200	50.0	2827	54.0	3073
Hodgdon H4831SC	Remington	CCI 200	53.5	2783	57.5	2993
IMR 4064	Remington	CCI 200	43.0	2729	47.0	2958
IMR 4320	Remington	CCI 200	43.0	2743	47.0	2946
IMR 4350	Remington	CCI 200	53.0	2773	57.0	3106
IMR 4831	Remington	CCI 200	53.0	2828	57.0	3108
IMR 4895	Remington	CCI 200	42.0	2790	46.0	2969
IMR SR 4759 (Reduced Load)	Remington	CCI 200	20.0	1680	24.0	2024
Ramshot Big Game	Federal	Federal 210	47.2	2790	52.1	3014
Vihtavuori N160	Remington	CCI 200	50.0	2794	54.0	2977
Winchester 760	Remington	CCI 250	48.5	2801	52.5	2975