



# 9.3x74R with 270 gr Semi-Spitzer SP Hot-Cor®



**Max Case Length:** 2.941"  
**Trim-to Length:** 2.931"  
**Max Cart. OAL:** 3.720"  
**RCBS Shell Holder:** # 4  
**Test Firearm:** Universal Receiver  
**Barrel Length:** 24"

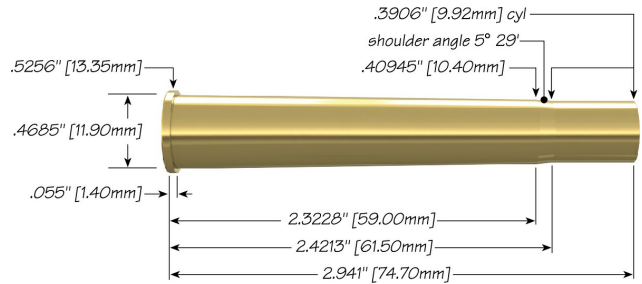

9.3mm	Speer Part No.	Weight, grains	COAL Tested	Ballistic Coefficient	Sectional Density
 <b>270 gr Semi-Spitzer SP Hot-Cor®</b>	2459	270	3.665	.361	.288

Propellant	Cartridge Case	Primer	START CHARGE		MAXIMUM CHARGE	
			Grain	Velocity (ft/sec)	Grain	Velocity (ft/sec)
Alliant Reloder 15	Norma	Federal 210	51.0	2142	<b>56.0</b>	2322
Alliant Reloder 16	Norma	Federal 210	58.7	2238	<b>64.4 C</b>	2403
Hodgdon H380	Norma	Federal 210	53.4	2113	<b>58.5</b>	2281
IMR 4350	Norma	Federal 210	55.6	2142	<b>61.8</b>	2339
IMR 4451	Norma	Federal 210	55.5	2129	<b>61.2</b>	2272
IMR 4831	Norma	Federal 210	56.8	2059	<b>63.1</b>	2240
Winchester 760	Norma	Federal 210	58.7	2169	<b>64.9</b>	2378

